



Catalogues and Products > Heating > High and Low Pressure Lpg Regulators for Civil-industrial Applications > **First Stage Regulator Mod. AP 30**

FIRST STAGE REGULATOR MOD. AP 30

Model with pressure gauge, safety valve and fixed or external setting, flow rate 25-40 kg/h

Product informations

First stage high pressure regulator **Mod. AP 30**, equipped with safety valve and pressure gauge; designed to be connected directly to the tank or cylinder, reducing the pressure to an intermediate pressure towards a second stage regulator.


Technical Features

TYPES OF GAS	LPG
FLOW RATE	<ul style="list-style-type: none"> • 25-40 KG - SKU 2341 • 30 KG - SKU 2331 / 2345
OPERATING TEMPERATURE	- 20°C ÷ + 50°C
INLET PRESSURE	2,5 ÷ 16 BAR
SAFETY VALVE SETTING	4 BAR
PRESSURE GAUGE RANGE	0 - 4 BAR
OUTLET PRESSURE	<ul style="list-style-type: none"> • 0,5 ÷ 2 BAR EXTERNAL SETTING - SKU 2341 • 1,5 BAR FIXED SETTING - SKU 2331 • 0,75 BAR FIXED SETTING - SKU 2345
CONNECTION	IN LEFT NUT W20LH-25-UN - OUT 3/8" F
MATERIALS	<ul style="list-style-type: none"> • BODY AND COVER: ZAMAK • DIAPHRAGM AND GASKETS: LPG RESISTANT ELASTOMER



First Stage Regulator Mod. AP 30

SKU	MODEL	PRICE
00000002331	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H	€80.05 VAT EXCLUDED
00000002341	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 25-40 KG/H	€74.6 VAT EXCLUDED
00000002345	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H	€58.4 VAT EXCLUDED

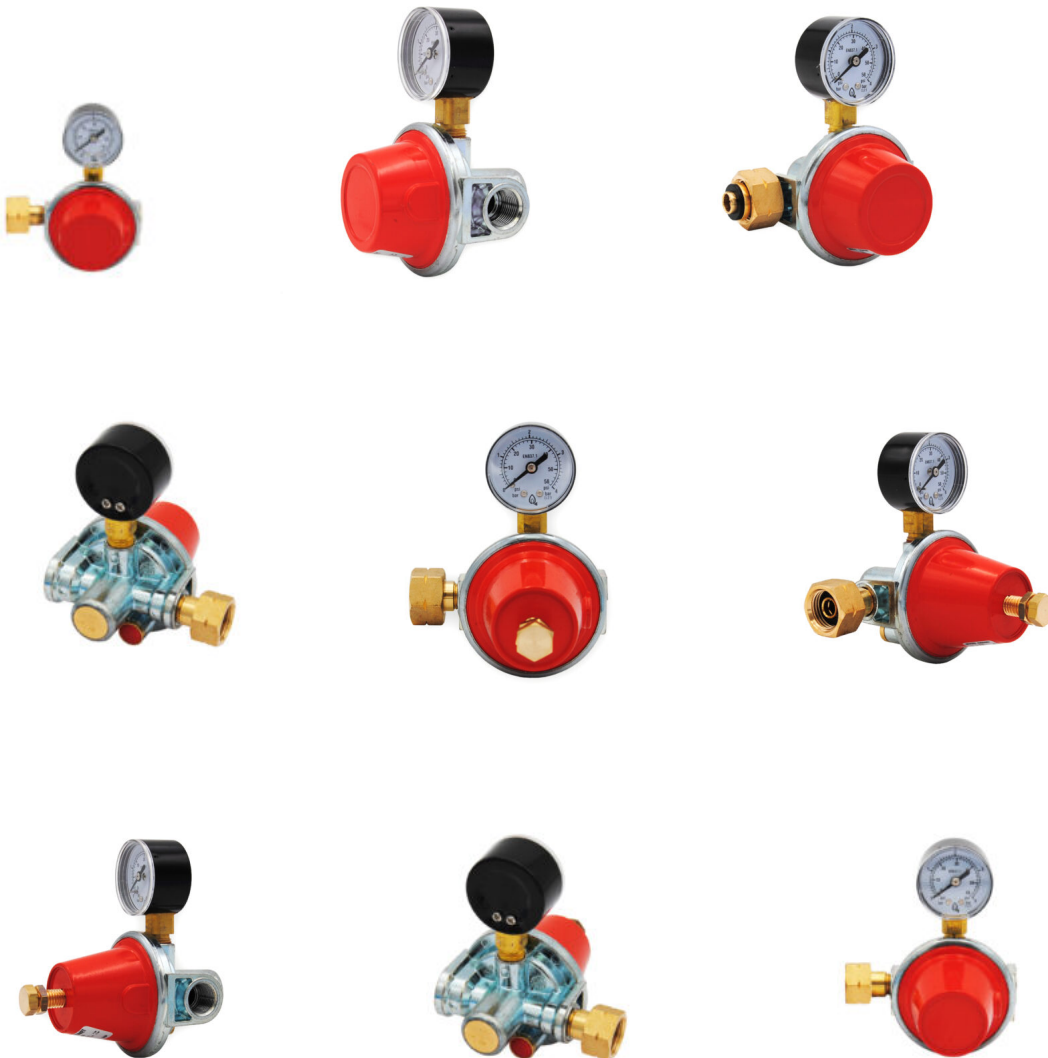



First Stage Regulator Mod. AP 30

