



Catalogues and Products > Heating > High and Low Pressure Lpg Regulators for Civil-industrial Applications > **First Stage Regulator Mod. AP 30**

## FIRST STAGE REGULATOR MOD. AP 30

Model with pressure gauge, safety valve and fixed or external setting, flow rate 25-40 kg/h

### Product informations

First stage high pressure regulator **Mod. AP 30**, equipped with safety valve and pressure gauge; designed to be connected directly to the tank or cylinder, reducing the pressure to an intermediate pressure towards a second stage regulator.


### Technical Features

<b>TYPES OF GAS</b>	LPG
<b>FLOW RATE</b>	<ul style="list-style-type: none"> <li>• 25-40 KG - <b>SKU 2341</b></li> <li>• 30 KG - <b>SKU 2331 / 2345</b></li> </ul>
<b>OPERATING TEMPERATURE</b>	- 20°C ÷ + 50°C
<b>INLET PRESSURE</b>	2,5 ÷ 16 BAR
<b>SAFETY VALVE SETTING</b>	4 BAR
<b>PRESSURE GAUGE RANGE</b>	0 - 4 BAR
<b>OUTLET PRESSURE</b>	<ul style="list-style-type: none"> <li>• 0,5 ÷ 2 BAR EXTERNAL SETTING - <b>SKU 2341</b></li> <li>• 1,5 BAR FIXED SETTING - <b>SKU 2331</b></li> <li>• 0,75 BAR FIXED SETTING - <b>SKU 2345</b></li> </ul>
<b>CONNECTION</b>	IN LEFT NUT W20LH-25-UN - OUT 3/8" F
<b>MATERIALS</b>	<ul style="list-style-type: none"> <li>• BODY AND COVER: ZAMAK</li> <li>• DIAPHRAGM AND GASKETS: LPG RESISTANT ELASTOMER</li> </ul>



**First Stage Regulator Mod. AP 30**

SKU	MODEL	PRICE
00000002331	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H	€80.05 VAT EXCLUDED
00000002341	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 25-40 KG/H	€74.6 VAT EXCLUDED
00000002345	HIGH PRESSURE REGULATOR MOD. AP 30 - IN LEFT NUT W20LH-25-UN - OUT 3/8" F - FLOW RATE 30 KG/H	€58.4 VAT EXCLUDED

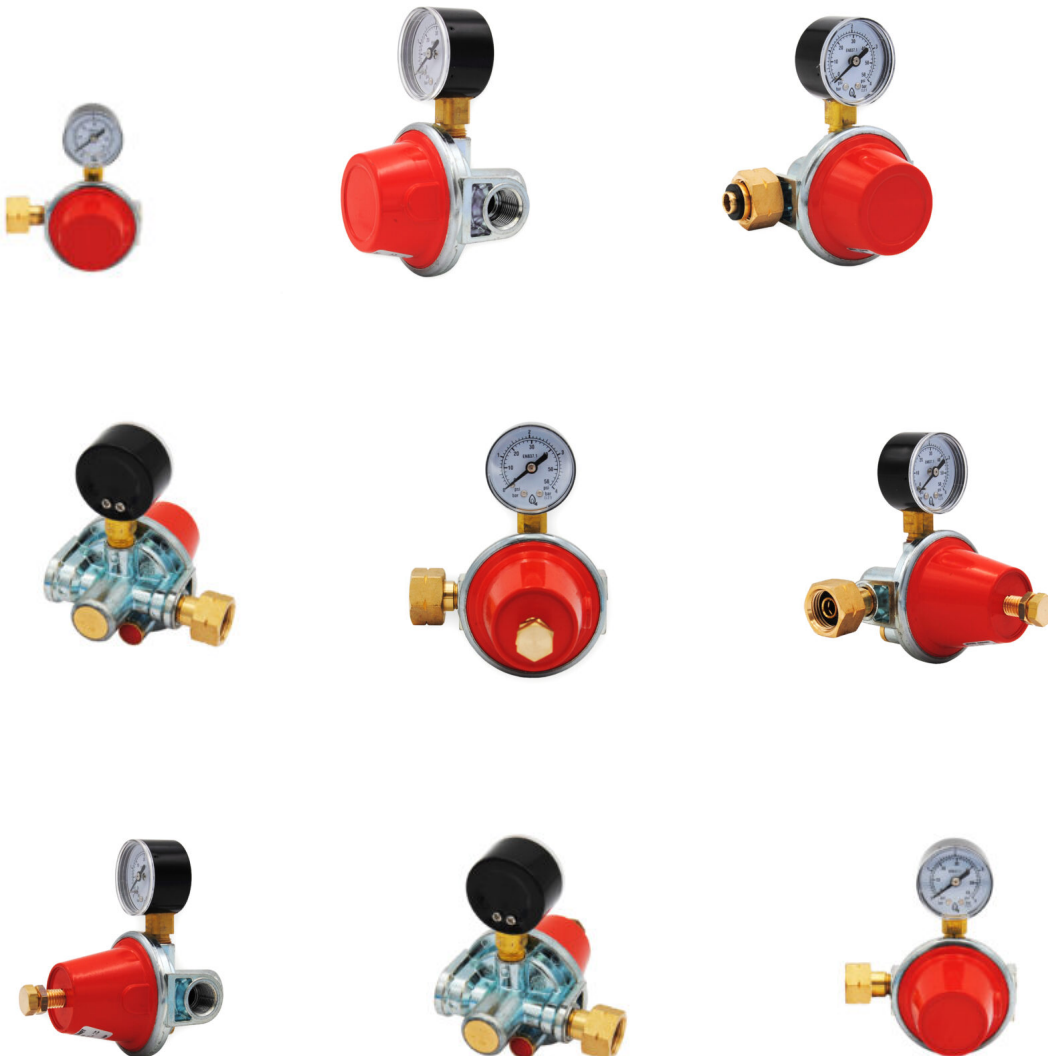



## First Stage Regulator Mod. AP 30

