



## DANFOSS GAS-OIL NOZZLE

Type OD

### Product informations

OD type gas-oil nozzles, designed for domestic and commercial gas-oil burners operating on light or heavy fuels.

**For the formation of the correct code to request and order, download and consult the table in the "Download" section below.**

### Technical Features

INFORMATION GIVEN ON THE NOZZLES	
N°1	SERIAL NUMBER FOR INTERNAL USE
N°2	REFERENCE FLOW RATE (US GAL/H)
N°3	SPRAY ANGLE AND GEOMETRY (S=FULL)
N°4	SPECIFIC CAPACITY EN (KG/H)
N°5	SPURT ANGLE AND ANGLE INDEX (ACCORDING TO EN 293 / EN 299)

TYPE OF NOZZLE	FULL CONE
----------------	-----------



## Danfoss Gas-Oil Nozzle


<b>FLOW RATE IN GPH</b>	PRESSURE 7 BAR, VISCOSITY 3,4 M3/S, DENSITY 0,82
<b>SINTERED BRONZE FILTER: UP TO 1,75 GPH</b>	
<b>MONEL FILTER: 2 TO 11 GPH</b>	
<b>SPURT ANGLE</b>	45° - 60° - 80°
<b>FLOW RATE</b>	FROM 0,40 TO 5 GPH
<b>FILTERING GRADE</b>	45 MM
<b>FILTER TYPE</b>	SINTERED OR MONEL
<b>MATERIAL</b>	BRASS

SKU	MODEL	PRICE
00000R03517	45° NOZZLE - GPH FLOW RATE 0,40 TO 5	€14.87 VAT EXCLUDED
00000R03518	60° NOZZLE - GPH FLOW RATE 0,40 TO 5	€13.05 VAT EXCLUDED
00000R03519	80° NOZZLE - GPH FLOW RATE 0,40 TO 5	€13.05 VAT EXCLUDED





## Danfoss Gas-Oil Nozzle

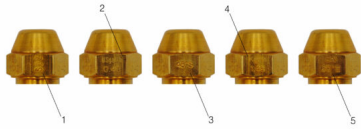

**COME FORMARE IL CODICE DELL'UGELLO DA ORDINARE:**  
HOW TO FORM THE NOZZLE CODE TO ORDER:

**45 075 R03517**

Gradi ugello / Nozzle degree: 45  
Portata in GPH / Flow rate (GPH): 075  
Codice ugello / Nozzle code: R03517